

PVI-3.0-TL-OUTD PVI-3.6-TL-OUTD PVI-4.2-TL-OUTD

GENERAL SPECIFICATIONS OUTDOOR MODELS

The most common residential inverter is the ideal size for an average-sized family home. This family of single-phase string inverter complements the typical number of rooftop solar panels, allowing home-owners to get the most efficient energy harvesting for the size of the property. This rugged outdoor inverter has been designed as a completely sealed unit to withstand the harshest environmental conditions.

One of the key benefits of the Uno family of single-phase inverters is the dual input section to process two strings with independent MPPT especially useful for rooftop installations with two different orientations (ie East and West). The high speed MPPT offers real-time power tracking and improved energy harvesting.


The transformerless operation gives the highest efficiency of up to 96.8%. The wide input voltage range makes the inverter suitable to low power installations with reduced string size.



Features


- Single phase output
- Each inverter is set on specific grid codes which can be selected in the field
- Dual input sections with independent MPP tracking, allows optimal energy harvesting from two sub-arrays oriented in different directions
- Wide input range
- High speed and precise MPPT algorithm for real time power tracking and improved energy harvesting
- Flat efficiency curves ensure high efficiency at all output levels ensuring consistent and stable performance across the entire input voltage and output power range
- Outdoor enclosure for unrestricted use under any environmental conditions
- Integrated DC disconnect switch in compliance with international Standards (-S Version)
- RS-485 communication interface (for connection to laptop or datalogger)
- Compatible with PVI-RADIOMODULE for wireless communication with Aurora PVI-DESKTOP

BLOCK DIAGRAM OF PVI-3.0/3.6/4.2-TL-OUTD

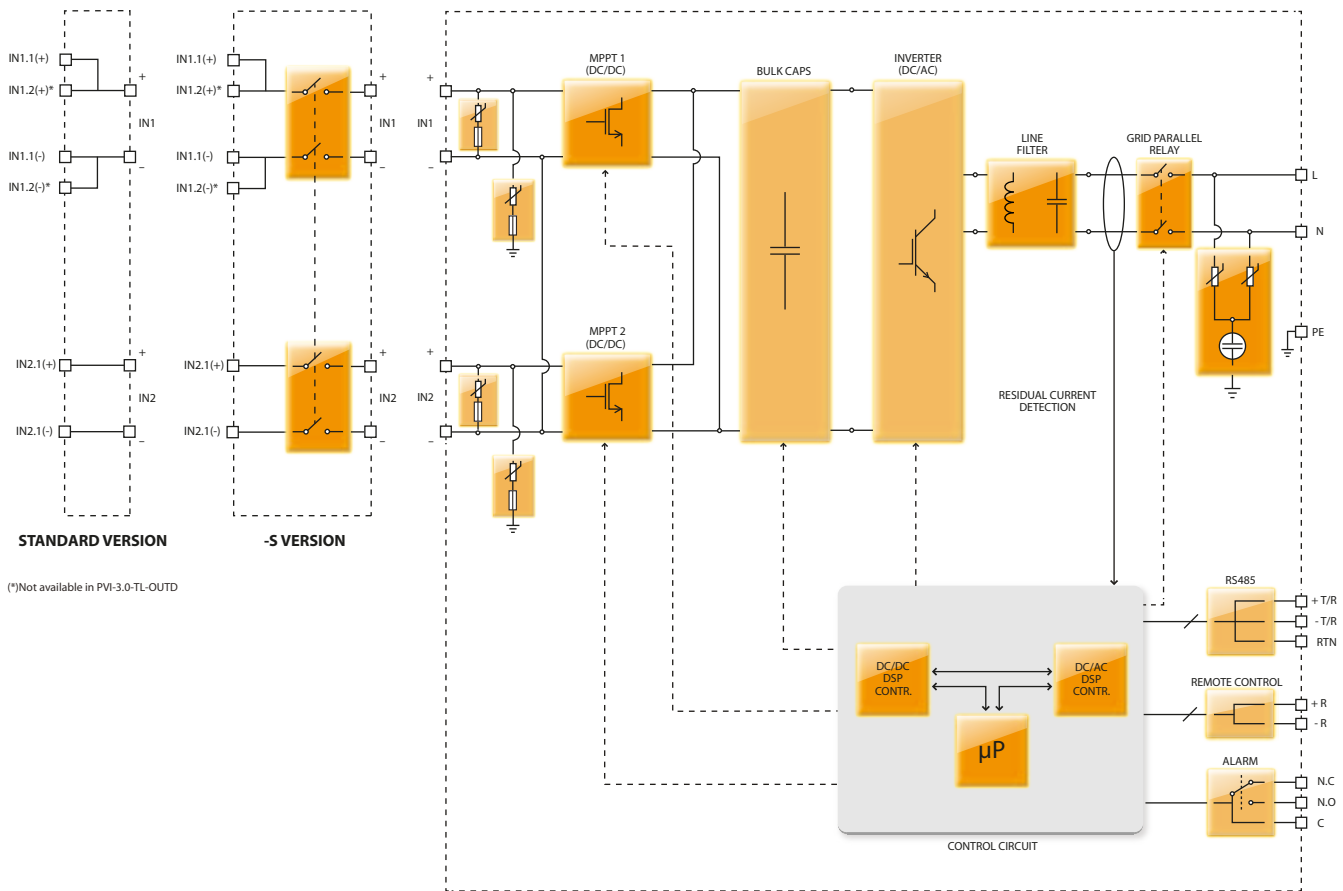


Block Diagram and Efficiency Curves

PVI-4.2-TL-OUTD

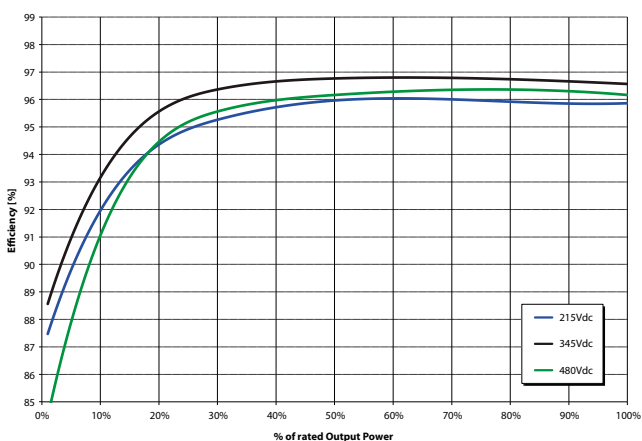

PVI-4.2-TL-OUTD

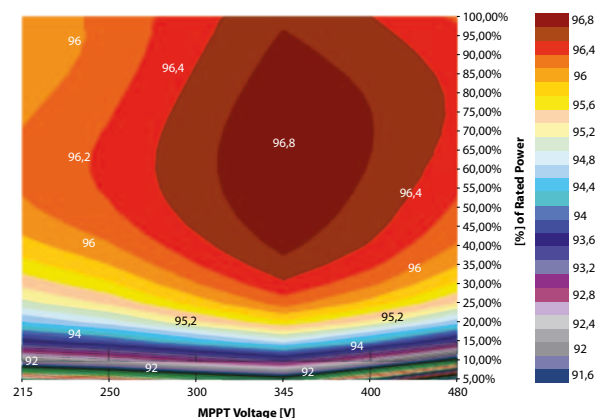

PARAMETER	PVI-3.0-TL-OUTD		PVI-3.6-TL-OUTD	PVI-4.2-TL-OUTD
Input Side				
Absolute Maximum DC Input Voltage (V _{max,abs})	600 V			
Start-up DC Input Voltage (V _{start})	200 V (adj. 120...350 V)			
Operating DC Input Voltage Range (V _{dcmi} ...V _{dcm})	0.7 x V _{start} ...580 V			
Rated DC Input Power (P _{dcr})	3120 W	3750 W	4375 W	
Number of Independent MPPT	2			
Maximum DC Input Power for each MPPT (P _{MPPTmax})	2000 W	3000 W	3000 W	
DC Input Voltage Range with Parallel Configuration of MPPT at P _{acr}	160...530 V	120...530 V	140...530 V	
DC Power Limitation with Parallel Configuration of MPPT	Linear Derating From MAX to Null [530V≤V _{MPPT} ≤580V]			
DC Power Limitation for each MPPT with Independent Configuration of MPPT at P _{acr} , max unbalance example	2000 W [200V≤V _{MPPT} ≤530V] the other channel: P _{dcr} =2000W [112V≤V _{MPPT} ≤530V]	3000 W [190V≤V _{MPPT} ≤530V] the other channel: P _{dcr} =3000W [90V≤V _{MPPT} ≤530V]	3000 W [190V≤V _{MPPT} ≤530V] the other channel: P _{dcr} =3000W [90V≤V _{MPPT} ≤530V]	
Maximum DC Input Current (I _{dcm}) / for each MPPT (I _{MPPTmax})	20.0 A / 10.0 A	32.0 A / 16.0 A	32.0 A / 16.0 A	
Maximum Input Short Circuit Current for each MPPT	12.5 A	20.0 A	20.0 A	
Number of DC Inputs Pairs for each MPPT	1	1	2 for MPPT1 and 1 for MPPT2	
DC Connection Type	Tool Free PV Connector WM / MC4			
Input Protection				
Reverse Polarity protection	Yes, from limited current source			
Input Over Voltage Protection for each MPPT - Varistor	2			
Photovoltaic Array Isolation Control	According to local standard			
DC Switch Rating for each MPPT (Version with DC Switch)	25 A / 600 V			
Output Side				
AC Grid Connection Type	Single phase			
Rated AC Power (P _{acr} @cosφ=1)	3000 W	3600 W	4200 W	
Maximum AC Output Power (P _{acmax} @cosφ=1)	3300 W ⁽⁴⁾	4000 W ⁽⁵⁾	4600 W ⁽⁶⁾	
Maximum Apparent Power (S _{max})	3330 VA	4000 VA	4670 VA	
Rated AC Grid Voltage (V _{acr})	230 V			
AC Voltage Range	180...264 V ⁽¹⁾			
Maximum AC Output Current (I _{ac,max})	14.5 A	17.2 A ⁽²⁾	20.0 A	
Contributory fault current	16.0 A	19.0 A	22.0 A	
Rated Output Frequency (f _i)	50 Hz / 60 Hz			
Output Frequency Range (f _{min} ...f _{max})	47...53 Hz / 57...63 Hz ⁽³⁾			
Nominal Power Factor and adjustable range	> 0.995, adj. ± 0.9 with P _{acr} =3.0 kW	> 0.995, adj. ± 0.9 with P _{acr} =3.6 kW	> 0.995, adj. ± 0.9 with P _{acr} =4.2 kW	
Total Current Harmonic Distortion	< 3.5 %			
AC Connection Type	Screw terminal block			
Output Protection				
Anti-Islanding Protection	According to local standard			
Maximum AC Overcurrent Protection	16.0 A	19.0 A	22.0 A	
Output Overvoltage Protection - Varistor	2 (L - N / L - PE)			
Operating Performance				
Maximum Efficiency (η _{max})	96.8%			
Weighted Efficiency (EURO/CEC)	96.0% / -			
Feed In Power Threshold	10.0 W			
Stand-by Consumption	< 8.0 W			
Communication				
Wired Local Monitoring	PVI-USB-RS232_485 (opt.), PVI-DESKTOP (opt.)			
Remote Monitoring	PVI-AEC-EVO (opt.), AURORA LOGGER (opt.)			
Wireless Local Monitoring	PVI-DESKTOP (opt.) with PVI-RADIOMODULE (opt.)			
User Interface	16 characters x 2 lines LCD display			
Environmental				
Ambient Temperature Range	-25...+60°C /-13...140°F with derating above 50°C/122°F	-25...+60°C /-13...140°F with derating above 55°C/131°F	-25...+60°C /-13...140°F with derating above 50°C/122°F	
Relative Humidity	0...100 % condensing			
Noise Emission	< 50 dB(A) @ 1 m			
Maximum Operating Altitude without Derating	2000 m / 6560 ft			
Physical				
Environmental Protection Rating	IP 65			
Cooling	Natural			
Dimension (H x W x D)	618mm x 325mm x 222mm / 24.3" x 12.8" x 8.7"			
Weight	17.5 kg / 38.5 lb			
Mounting System	Wall bracket			
Safety				
Isolation Level	Transformerless			
Marking	CE			
Safety and EMC Standard	EN62109-1, EN62109-2, AS/NZS3100, AS/NZS 60950, EN61000-6-1, EN61000-6-3, EN61000-3-2, EN61000-3-3 CEI 0-21, VDE 0126-1-1, VDE-AR-N 4105, G83/1, EN 50438 (not for all national appendices), RD1699, AS 4777, C10/11, IEC 61727, ABNT NBR 16149	EN62109-1, EN62109-2, AS/NZS3100, AS/NZS 60950, EN61000-6-1, EN61000-6-3, EN61000-3-11, EN61000-3-12 CEI 0-21, VDE 0126-1-1, VDE-AR-N 4105, G83/1, G59/2, EN 50438 (not for all national appen- dices), RD1699, AS 4777, C10/11, IEC 61727, ABNT NBR 16149	EN62109-1, EN62109-2, AS/NZS3100, AS/NZS 60950, EN61000-6-1, EN61000-6-3, EN61000-3-11, EN61000-3-12 CEI 0-21, VDE 0126-1-1, VDE-AR-N 4105, G59/2, EN 50438 (not for all national appendices), RD1699, AS 4777, C10/11, IEC 61727, ABNT NBR 16149	
Grid Standard				
Available Products Variants				
Standard	PVI-3.0-TL-OUTD	PVI-3.6-TL-OUTD	PVI-4.2-TL-OUTD	
With DC Switch	PVI-3.0-TL-OUTD-S	PVI-3.6-TL-OUTD-S	PVI-4.2-TL-OUTD-S	

1. The AC voltage range may vary depending on specific country grid standard

2. For UK G83/1 setting, maximum output current limited to 16A up to a maximum output power of 3.68kW.

3. The Frequency range may vary depending on specific country grid standard

4. Limited to 3000 W for Germany

5. Limited to 3600 W for Germany

6. Limited to 4200 W for Germany

Remark. Features not specifically listed in the present data sheet are not included in the product



www.power-one.com

Power-One Renewable Energy

Worldwide Sales Offices

Country	Name/Region	Telephone	Email
Australia	Asia Pacific	+61 2 9735 3111	sales.australia@power-one.com
China (Shenzhen)	Asia Pacific	+86 755 2988 5888	sales.china@power-one.com
China (Shanghai)	Asia Pacific	+86 21 5505 6907	sales.china@power-one.com
India	Asia Pacific	+65 6896 3363	sales.india@power-one.com
Japan	Asia Pacific	03-4580-2714 / +81-3-4580-2714	sales.japan@power-one.com
Singapore	Asia Pacific	+65 6896 3363	sales.singapore@power-one.com
Belgium / The Netherlands / Luxembourg	Europe	+32 2 206 0338	sales.belgium@power-one.com
France	Europe	+33 (0) 141 796 140	sales.france@power-one.com
Germany	Europe	+49 7641 955 2020	sales.germany@power-one.com
Greece	Europe	00 800 00287672	sales.greece@power-one.com
Italy	Europe	00 800 00287672	sales.italy@power-one.com
Spain	Europe	+34 91 879 88 54	sales.spain@power-one.com
United Kingdom	Europe	+44 1903 823 323	sales.uk@power-one.com
Dubai	Middle East	+971 50 100 4142	sales.dubai@power-one.com
Israel	Middle East	+972 0 3 544 8884	sales.israel@power-one.com
Canada	North America	+1 877 261-1374	sales.canada@power-one.com
USA East	North America	+1 877 261-1374	sales.usaeast@power-one.com
USA Central	North America	+1 877 261-1374	sales.usacentral@power-one.com
USA West	North America	+1 877 261-1374	sales.usawest@power-one.com